

Mini Review

Uterine Blood Flow Indices in Sheep during Pregnancy

Mohammed A Elmetwally

Theriogenology department, Faculty of Veterinary Medicine, Mansoura University, Egypt

Introduction

To understand the different changes and events that occur in humans from conception until labour our experimental animal model is the ewe. Some studies use laboratory rodents, non-human primates and domestic ruminants as a model for research relevant to human pregnancies.¹ Sheep, humans and other higher primates have villous interdigitation, wherein the chorion has a tree-like branching pattern, and villi either fit into endometrial crypts or are they are directly bathed in maternal blood.² Furthermore, Pelage et al. demonstrated that the uterine vascularization of non-pregnant sheep is similar to that of women; so the sheep represents an appropriate animal model for experimental uterine artery embolization.³ The previous authors analysed the anatomy of the uterine vasculature in non-pregnant ewes by following the tributaries and anastomoses of the middle uterine artery which is considered to be the main arterial supply for the uterine vasculature. As described in Figure 1, the origin of the uterine artery from the internal iliac artery was similar to that in women.^{3,4}

Other studies were to analyze the uterine arterial blood supply in sheep recognized by the end the presence of pelvic anastomoses similar to those in women. The uterine artery originated from the internal iliac artery and then divided into dorsal and ventral branches.⁵ This pattern of division of the

internal iliac artery was similar to that reported for women.^{2,6} The pregnant sheep has been used to study the fetal-maternal communication. This may be attributed to the ability to surgically place and maintain catheters in both the maternal and fetal vasculature for repeated sampling of blood from pregnant ewes and their fetuses not under anesthesia.

Sheep represents an appropriate animal model to study uterine blood flow in women, because of the similarities of uterine vascularization and the existence of pelvic anastomoses in both non-pregnant sheep and women

Principles of Color Doppler Sonography Imaging

The use of doppler ultrasound during pregnancy provides a non-invasive method to study fetal, as well as maternal hemodynamics. Investigation of the uterine and umbilical arteries provides information on perfusion of the uteroplacental and fetoplacental circulations, respectively.⁷

The frequency of the ultrasound wave changes according to the relationship between the motion of both sender and receiver. Doppler first describe this phenomenon in 1842.⁸ It was later known as the Doppler effect. Doppler described the application of this effect to both acoustics and optics, principally to the color of double stars and fluctuations in variable stars and novae. Vascular Doppler ultrasound is based on the Doppler effect which results from the scattering and reflection of ultrasound beams originating from the probe (Piezo-crystals) and moving to the reflecting object such as circulating red blood cells within blood vessels. A positive frequency is usually created when the object is moving toward the probe and vice versa. The difference in frequency between the released and returned signals is described as Doppler shift, which depends on the speed of the moving object. Processing of this Doppler shift can produce either a color flow display or a Doppler sonogram.⁹⁻¹¹

Doppler ultrasound has been used to measure the changes in frequency of echoes in order to calculate the speed of moving objects, such as measurement of the rate of blood flow through the heart and major arteries.¹² The first use of Doppler ultrasound technology was in the form of a continuous wave which assessed the Doppler shift within the ultrasound beam, but not the Doppler shift in a small defined area of distinct blood vessels. This Doppler was unable to assess flow direction or different velocities.¹³⁻¹⁵ The next generation was the pulsed wave or range-gated Doppler, which provides information about the depth and velocities of blood flow.¹⁶ Therefore, it can be used to evaluate specific blood vessels and provide color flow imaging. The targeted blood vessel is located first by continuous Doppler. The Pulsed Doppler is then used after adjustment of the gate exactly over the targeted blood vessel.¹²

The next advance in Doppler development was color Doppler sonography (Color Doppler imaging), which has the

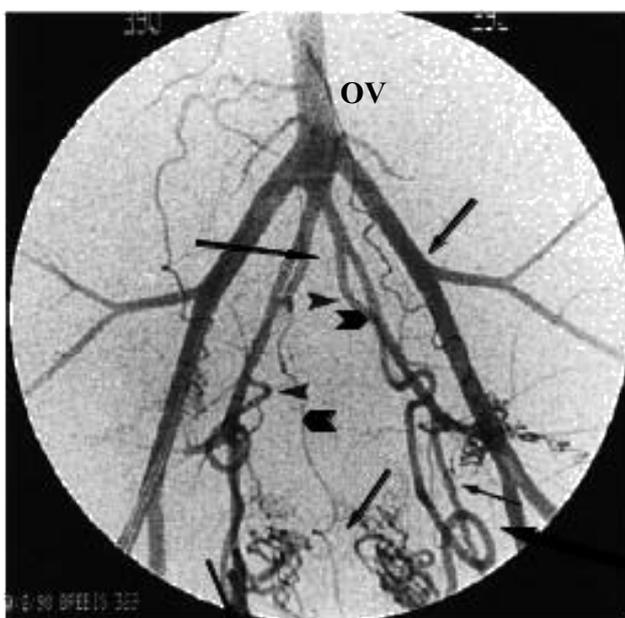


Figure 1: Uterine arteries in sheep: modified: utero-ovarian anastomosis (arrow), uterine arteries (arrowheads).³

UT: Uterine Artery; AO: Aorta; OV: Ovarian Artery; CI: Common Iliac Artery; EI: external Iliac Artery; II: Internal Iliac Artery; MS: Main Sacral Artery; UG: Urogenital Artery

ability to visually assess blood flow velocities and perfusion in B-mode gray images.¹⁷ Color imaging Doppler means that the instruments can impose color signals of blood flow on a gray-scale image (B-mode), the first two (continuous wave and pulsed wave) are known as spectral Doppler. The brightness of color pixels depends on the angle of insonation (Doppler insonation angle) between the ultrasound beam and the direction of flow in the blood vessel. This angle plays an essential role in the interpretation of Doppler parameters.¹⁸

The Doppler waveform represents changes in blood flow during one cardiac cycle. The pulse repetition frequency (PRF) of the ultrasound instrument must be at least half of the Doppler shift. When the beam angle and/or blood velocity is greater than half of the PRF, aliasing (an effect resulting in signals being indistinguishable) is the result. Aliasing is a common Doppler artefact in which the peak in the velocity waveform appears under the baseline. The explanation of this artefact is based on sending a second pulse from the transducer before receiving the first one (a result of incorrect Doppler angle and/or greater blood velocity than half PRF), with the result that the receiver cannot discriminate between signals from both pulses.⁷

Doppler frequency is increased with greater alignment of the insonation angle. Therefore, the angle should be as small as possible (15-60°). In contrast, with decreased ultrasound frequency, the Doppler frequency is also decreased.¹¹

Anatomical View of the Uterine Vasculature in Sheep

The value of color Doppler ultrasonography in pregnant and non-pregnant animals depends mainly on the proper identification of blood vessels. Consequently, it is important to be familiar with the anatomy of the vasculature of the uterus in small ruminants. For sheep, the uterine vasculature has been described (Figure 1).^{3,19} The main blood source is the uterine artery which is supported by uterine branches from both the ovarian and vaginal arteries, which form anastomoses with the ipsilateral uterine artery. The uterine arteries are derived from the internal iliac arteries which originate as a common trunk from the abdominal aorta and then divide into the right and left internal iliac arteries. The internal iliac artery of each side is divided into cranial and caudal branches. The cranial branch further divides into visceral branches to the pelvic organs, including the uterus.

Uterine artery

Three main types of vascular anastomoses are found in sheep. First, there is a transverse anastomosis between the right and left uterine arteries. The second one is found between the uterine and ovarian arteries, and the last one between the uterine and vaginal arteries. The uterine vessels are highly tortuous, which decreases with expansion of the uterus during pregnancy (Figure 2).^{20,21}

Vaginal artery

It usually commences as a branch from the cranial internal iliac artery and is directed caudally to supply the caudal part of the cervix and the vagina.

Ovarian artery

It originates from the anteriolateral part of the abdominal aorta and supplies the ovary, the Fallopian tube through the

Ramus tubarius and tip of the uterine horn through the Ramus uterinus.²¹ Since the uterine vasculature in sheep is similar to that of women, the ewe is considered to be suitable animal model for research relevant to human gynaecology and obstetrics.³

The evaluation of color Doppler images recorded by color Doppler flow mode of ultrasound machine was first done via using a computerized image analysis method.²²⁻²⁴ The images of cross sections of about the tissue under examination can be created and then transferred to PC where a specific program for analyses of blood vessels blood flow changes in certain predetermined area generally called "Region Of Interest (ROI)". Within this area the total area of the perfused areas and the total number of color pixels as a measure of blood flow using throughout software.^{22,25} The analysis of the Doppler waves may be qualitative, semi-quantitative and quantitative done.⁷ The assessments of Doppler sonography may be one of three: qualitative, semi-quantitative, and, finally, quantitative. The first one, qualitative, depends mainly on wave analysis as the presence or absence of end diastolic blood flow and its relation to the previous and next peak systolic blood flow. It also concerns the wave characteristics as above or under the baseline, in addition to increased and/or decreased end diastolic velocity of blood flow, either physiological or pathological.^{22,26-28} The second, semi-quantitative, depends mainly on descriptions of blood flow indices, which are independent of the insonation angle. Measurements of the Doppler indices PI (pulsatility index) and RI (resistance index) include calculations of peak velocity (PV) and the time averaged maximum velocity (TAMV) values over the time of the cardiac cycle. These Doppler indices provide important information to enable the researcher or the clinician to understand the extent of vascular perfusion.²⁸ The quantitative analysis includes evaluation of blood flow parameters that require adjustment of the Doppler angle between Doppler beam and blood vessel, as well as the measurement of diameter of the target blood vessel to calculate blood flow volume, BFV.^{29,30} Nowadays, there are some ultrasound machines that can assess the Doppler waves without transferring images to PC as used by Elmetwally et al.²⁰ All parameters are measured except for blood flow volume which requires manual adjustment of Doppler angle between Doppler beam and blood flow. In conclusion,

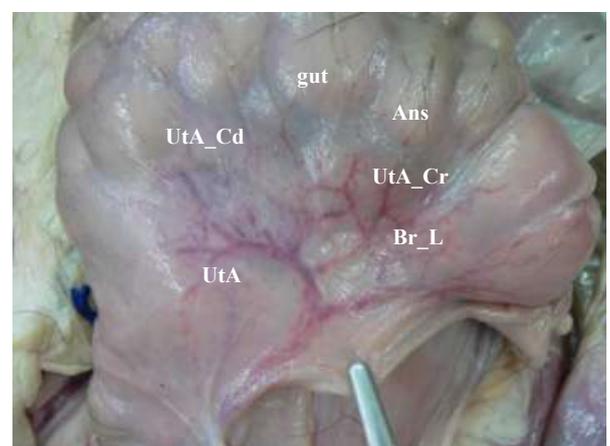


Figure 2: Uterine artery in a goat *in situ*.

(UtA: Uterine Artery, g_ut: gravid uterus, UtA_Cr: Cranial Branch of Uterine Artery, UtA_Cd: Caudal Branch of Uterine Artery, Ans: Anastomosis between Cranial and Caudal Branch of Uterine Artery, Br_L: Broad Ligament)

the Doppler indices provide measures of the resistance ratios to blood flow in the distal portion of the examined artery in the vascular bed. The higher the index value, the greater the resistance to blood flow in the respective vascular organ and vice versa.⁷ The most regularly used color Doppler indices are described in schematic diagram “Figure 3: manipulation and orientation” modified from Elmetwally. The setting for the range of flow-velocity was adjusted to obtain the spectral graph, and a Doppler spectrum is generated across at least 3 to 5 uniform cardiac cycles and one the waves is used for spectral measurements.⁵ The means for two to three measurements are used for statistical analysis. The important parameters (Figure 3) reported for Doppler evaluations of blood flow are defined as follows.

The resistance index (RI) is one of the most important indices of vascular perfusion of the tissue and it is recommended usually for low resistance vascular beds with continuous blood flow during diastole. It can be calculated using the following equation (RI=PSV-EDV/PSV).³¹ The importance of the resistance index stems from its negative relationship with vascular perfusion. Namely, decreasing resistance increases vascular perfusion and vice versa.

The pulsatility index (PI) can be calculated using the following equation (PI=PSV-EDV/TAMV).³² Increases in PI indicate decreases in tissue perfusion and vice versa. As the relation of PI to RI is positive, one of these indices is assumed to be sufficient. The usefulness of PI and RI as Doppler indices in most color Doppler studies is that they are not affected by both Doppler angle and diameter of blood vessel, but are affected only by heart rate¹¹ As gestation advances, PI and RI decrease progressively, indicating an increase in fetal blood perfusion.³³ Furthermore, RI and PI are ratios of velocity measurements independent of Doppler angle.^{5,20}

The systolic/diastolic ratio (S/D ratio) indicates the impedance of blood flow. A decrease in this ratio indicates an increase in blood perfusion of the target tissue (S is the maximum Doppler shift frequency and D is the minimum Doppler shift frequency).³⁴ This ratio is not often used, especially with the development of PI and RI measuring software.³⁵

In order to evaluate the blood flow in small vessels, especially those that do not have collateral circulation and where there is difficulty in measuring the diameter, time averaged maximum velocity (TAMV) is usually used.⁷ TAMV is calculated from time averaged maximum frequency shift over the cardiac cycle [TAMV=TAMVF*c/2F_x cos α, where c=ultrasound propagation speed, F=transmitted wave frequency and α=angle between ultrasound beam and blood flow direction].³⁶

The blood flow volume (BFV) to the target tissue depends mainly on the mean velocity and the diameter of the target blood vessel. It can be calculated using the equation (BFV=Vel*A), where Vel is the time averaged maximum velocity during the cardiac cycle and A is the cross-sectional area of the target blood vessel which can be calculated from the vessel diameter and measured from B-mode images. From the vessel diameter, BFV can be calculated accurately by Doppler ultrasound when the diameter is ≥ 2 mm.⁷ Three measurements should be taken using B-mode gray imaging for vessel diameter, and at least 3 to 4 cardiac cycle wave forms are needed to measure flow velocity. These measurements should also be associated with adjustment of the Doppler angle.

Development of Color Doppler Ultrasound Application in Sheep

Doppler ultrasonography has been used successfully for pregnancy diagnosis in women as early as 12 week of gestation. Further studies³⁷⁻³⁹ determined the maternal, fetoplacental and

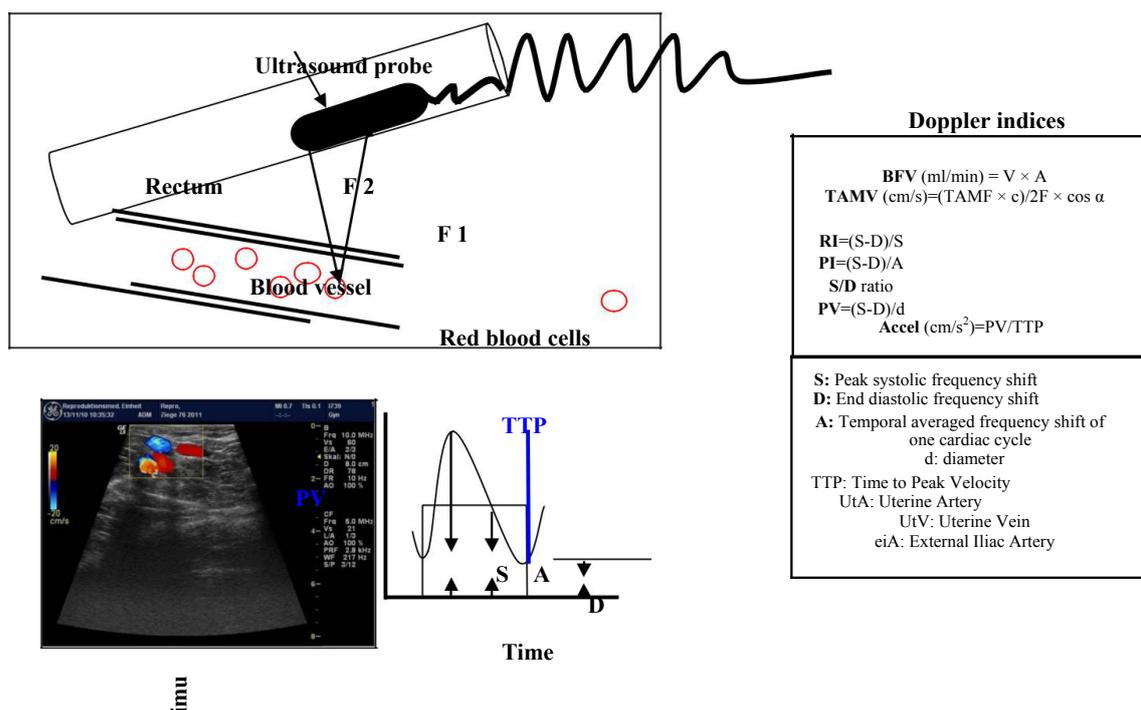


Figure 3: Manipulation and orientation of Doppler ultrasound probe and the different Doppler indices.^{7,31,32,34}

umbilical blood flows and impedance of these blood flows. In human reproduction, a relationship was found between the maternal and umbilical blood flow and the intra-uterine fetal growth.^{38,40}

Lindhahl is considered to be one of the first researchers to use ultrasound based echo principles for pregnancy diagnosis in ewes between 60 and 80 days after conception.⁴¹ Thereafter, Hulet used Doppler ultrasonography with an accuracy of 97% to 99% for pregnancy diagnosis in ewes between 75 and 92 days of gestation.⁴² The basic principle of these Doppler investigations was to detect fetal heart beats, arterial pulsations or movements [of what??] in the caudal abdominal region of pregnant ewes. Detection of arterial pulsations or heart beats from both sides of the abdomen or in two different regions during the same scanning may indicate multiple pregnancies⁴³ and failure to detect pulsations, heart beats and fetal movement are indicators that the ewe is not pregnant.⁴⁴ Furthermore, there is a higher rate of accuracy in both single (82.6%) and multiple (92.9%) investigations by the Doppler method than by the real-time linear ultrasound scanning methods (68.2% and 66.7%, respectively) in pregnant ewes.⁴³ The earliest time at which pregnancy could be detected using external transducers with either the Doppler or A-scope technique was between 40 and 50 days after mating, but with some difficulties in determining the number of foetuses.⁴⁵

A surgical feto-maternal model for Doppler sonographic measurements of the maternal middle uterine artery and fetal umbilical artery blood flow characteristics in ewes was developed by Soma et al.⁴⁶ Further, Doppler ultrasonic studies have been performed with the development of continuous wave Doppler ultrasonography and were used to study of some characteristics of the uterine artery or main vessels supplying placentomes and umbilical blood flow in ewes.^{47,48} Blood flow parameters were used to differentiate between normal and abnormal pregnancies in small ruminants and in other animal species and women.^{47,49} Also, they were used for determination of functional changes in female genitalia under the effect of cyclic hormones in women^{26,50,51} and in animals.^{5,29,36} As well, colour Doppler sonography has been used to study uterine artery blood flow postpartum in cows and small ruminants, respectively.^{52,53}

Invasive color Doppler sonographic validation of uterine blood flow in pregnant sheep was performed using the transit-time ultrasonic perivascular flow probe method. The authors concluded that the uterine blood flow velocities reflect uteroplacental volume blood flow.^{54,55}

Physiologically, the uterine and umbilical blood flows increases continuously during pregnancy to meet the increases in nutrient demand for fetal and placental growth.^{56,57} The use of serial uterine blood flow volume measurements in pregnant sheep, from mid- to late-gestation, to describe the consequences of an induced intrauterine fetal growth restriction was studied by Wallace et al. using a perivascular Doppler flow probe attached to the uterine artery of the pregnant uterine horn from 83 days until 145 days of pregnancy.⁵⁸ Furthermore, colour Doppler indices of uterine artery Doppler indices were used to assess fetal risk during pregnancies.^{59,60} Recently, colour Doppler ultrasound imaging was used to assess changes in uterine and

umbilical blood flows throughout normal pregnancy in small ruminants.^{5,20}

Acknowledgement

I would like to thank Prof. Dr. Fuller Bazer, Department of Animal Sciences, College of Agriculture and Life Sciences, Texas A&M University, College Station, Texas for editorial comments and critical reading of this mini-review.

REFERENCES

1. Barry JS, Anthony RV. The pregnant sheep as a model for human pregnancy. *Theriogenology* 2008; 69: 55-67.
2. Swanson AM, David AL. Animal models of fetal growth restriction: Considerations for translational medicine. *Placenta* 2015; 36: 623-630
3. Pelage JP, Laurent A, Bonneau M, Wassef M, Rymer R, et al. Arterial blood supply to the uterus in nonpregnant sheep: A pertinent model for clinical practice? *Invest Radiol* 2001; 36: 721-725.
4. Merland JJ, Riche MC, Chiras J, Melki JP, Tricot JF, et al. Congenital arterio-venous malformations. Long-term therapeutic effects of arterial ligatures. A plea for their abandon in favour of more recent procedures. *Sem Hop* 1981; 57: 555-561
5. Elmetwally M, Rohn K, Meinecke-Tillmann S. Non-invasive color Doppler sonography of uterine blood flow throughout pregnancy in sheep and goats. *Theriogenology* 2016; 85: 1070-1079 e1071.
6. Saso S, Petts G, Thum MY, Corless D, Boyd MD, et al. Achieving uterine auto-transplantation in a sheep model using iliac vessel anastomosis: a short-term viability study. *Acta Obstet Gynecol Scand* 2014; 94: 245-252.
7. Dickey RP. Doppler ultrasound investigation of uterine and ovarian blood flow in infertility and early pregnancy. *Hum Reprod Update* 1997; 3: 467-503
8. Doppler C. Ueber das farbige Licht der Doppelsterne und einiger anderer Gestirne des Himmels bhandlungen der k böhm. Gesellschaft der Wissenschaften 1842; 2: 465-482.
9. Bascom PA, Cobbold RS. Origin of the Doppler ultrasound spectrum from blood. *IEEE Trans Biomed Eng* 1996; 43: 562-571
10. Fontaine I, Cloutier G. Modeling the frequency dependence (5-120 MHz) of ultrasound backscattering by red cell aggregates in shear flow at a normal hematocrit. *J Acoust Soc Am* 2003; 113: 2893-2900.
11. Maulik D. Physical principles of Doppler ultrasonography: Doppler ultrasound in obstetrics and gynecology, Springer Berlin Heidelberg; Auflage 2005; 9-17.
12. Tu H, Zagzebski JA, Gerig AL, Chen Q, Madsen EL, et al. Optimization of angular and frequency compounding in ultrasonic attenuation estimations. *J Acoust Soc Am* 2005; 117: 3307-3318.
13. Burns PN. Principles of Doppler and color flow. *Radiol Med* 1993; 85: 3-16

14. Burns PN, Hammers L. FM ultrasonography: a revolution? *Hepatology* 1987; 7: 1382-1384.
15. Dickerson KS, Newhouse VL, Tortoli P, Guidi G. Comparison of conventional and transverse Doppler sonograms. *J Ultrasound Med* 1993; 12: 497-506.
16. Tekay AaSC. Doppler ultrasonography in obstetrics. *Callen Ultrasonography in Obstetrics and Gynecology* (5th edn) WB SAUNDERS 2000; 677-689.
17. Martinoli C, Derchi LE, Rizzatto G, Solbiati L. Power Doppler sonography: general principles, clinical applications, and future prospects. *Eur Radiol* 1998; 8: 1224-1235.
18. Kremkau F. Doppler angle error due to refraction. *Ultrasound Med Biol* 1990; 16: 523-524.
19. Mounts KO, Worrell MB, Boyle DW. Collateral arterial blood supply to the pregnant uterus in the sheep. *J Anat* 1995; 187: 191-196.
20. Elmetwally M. Clinical applicability of non-invasive Doppler ultrasonography in small ruminants throughout pregnancy. Hannover, Tierärztliche Hochsch, Diss 2012.
21. Nickel R, Schummer A, Seiferle E. *Lehrbuch der Anatomie der Haustiere Band III*, Verlag Paul Parey. Berlin und Hamburg 1984; 183-188.
22. Acosta TJ, Miyamoto A. Vascular control of ovarian function: ovulation, corpus luteum formation and regression. *Anim Reprod Sci* 2004; 82: 127-140.
23. Bollwein H, Mayer R, Weber F, Stolla R. Luteal blood flow during the estrous cycle in mares. *Theriogenology* 2002; 57: 2043-2051.
24. Herzog K, Struve K, Kastelic JP, Piechotta M, Ulbrich SE, et al. *Escherichia coli* lipopolysaccharide administration transiently suppresses luteal structure and function in diestrous cows. *Reproduction* 2012; 144: 467-476.
25. Herzog K, Kiossis E, Bollwein H. Examination of cyclic changes in bovine luteal echo texture using computer-assisted statistical pattern recognition techniques. *Anim Reprod Sci* 2008; 106: 289-297.
26. Goswamy RK, Steptoe PC. Doppler ultrasound studies of the uterine artery in spontaneous ovarian cycles. *Hum Reprod* 1988; 3: 721-726.
27. Goswamy RK, Williams G, Steptoe PC. Decreased uterine perfusion—a cause of infertility. *Hum Reprod* 1988; 3: 955-959.
28. Urban MW, Bernal M, Greenleaf JF. Phase aberration correction using ultrasound radiation force and vibrometry optimization. *IEEE Trans Ultrason Ferroelectr Freq Control* 2007; 54: 1142-1153.
29. Bollwein H, Luttgenu J, Herzog K. Bovine luteal blood flow: Basic mechanism and clinical relevance. *Reprod Fertil Dev* 2012; 25: 71-79.
30. Joern H, Funk A, Goetz M, Kuehlwein H, Klein A, et al. Development of quantitative Doppler indices for uteroplacental and fetal blood flow during the third trimester. *Ultrasound Med Biol* 1996; 22: 823-835.
31. Pourcelot L. Applications clinique de pexamen Doppler transcutance. *Belocimetric Ultrasonore Doppler*. INSERM, Paris 1974; 213.
32. Gosling RG, Dunbar G, King DH, Newman DL, Side CD, et al. The quantitative analysis of occlusive peripheral arterial disease by a non-intrusive ultrasonic technique. *Angiology* 1971; 22: 52-55.
33. Gupta U, Qureshi A, Samal S. Doppler velocimetry in normal and hypertensive pregnancy. *The Internet Journal of Gynecology and Obstetrics* 2009; 11: 2.
34. Stuart B, Drumm J, FitzGerald DE, Duignan NM. Fetal blood velocity waveforms in normal pregnancy. *Br J Obstet Gynaecol* 1980; 87: 780-785.
35. Spencer JA, Giussani DA, Moore PJ, Hanson MA. In vitro validation of Doppler indices using blood and water. *J Ultrasound Med* 1991; 10: 305-308.
36. Bollwein H, Meyer HH, Maierl J, Weber F, Baumgartner U, et al. Transrectal Doppler sonography of uterine blood flow. *Theriogenology* 2000; 53: 1541-1552.
37. Giles WB, Trudinger BJ, Cook CM. Fetal umbilical artery flow velocity-time waveforms in twin pregnancies. *Br J Obstet Gynaecol* 1985; 92: 490-497.
38. Schulman H, Fleischer A, Stern W, Farmakides G, Jagani N, et al. Umbilical velocity wave ratios in human pregnancy. *Am J Obstet Gynecol* 1984; 148: 985-990.
39. Trudinger BJ, Giles WB, Cook CM. Flow velocity waveforms in the maternal uteroplacental and fetal umbilical placental circulations. *Am J Obstet Gynecol* 1985; 152: 155-163.
40. Gebb J, Demasio K, Dar P. Prenatal sonographic diagnosis of familial Saethre-Chotzen syndrome. *J Ultrasound Med* 2011; 30: 420-422.
41. Lindahl IL. Detection of pregnancy in sheep by means of ultrasound. *Nature* 1966; 212: 642-643.
42. Hulet CV. Pregnancy diagnosis in the ewe using an ultrasonic doppler instrument. *J Anim Sci* 1969; 28: 44-47.
43. Fukui Y, Kobayashi M, Tsubaki M, Testuka M, Shmoda K. Comparison of two ultrasonic methods for multiple pregnancy diagnosis in sheep and indicators of multiple pregnant ewes in the blood. *Anim Reprod Sci* 1986; 11: 25-33.
44. Lindahl IL. Pregnancy diagnosis in dairy goats using ultrasonic Doppler instruments. *J Dairy Sci* 1969; 52: 529-530.
45. Lindahl IL. Pregnancy diagnosis in the ewe by intrarectal Doppler. *J Anim Sci* 1971; 32: 922-925.
46. Soma LR, White RJ, Kane PB. Surgical preparation of a chronic maternal-fetal model in pregnant sheep: a technique for the measurement of middle uterine blood flow, umbilical blood flow and fetal sampling in the awake sheep. *J Surg Res* 1971; 11: 85-94.
47. Lemley CO, Meyer AM, Camacho LE, Neville TL, Newman DJ, et al. Melatonin supplementation alters uteroplacental hemodynamics and fetal development in an ovine model of intrauterine growth restriction. *Am J Physiol Regul Integr Comp Physiol* 2012; 302: R454-R467.

48. Newnham JP, Kelly RW, Roberts RV, MacIntyre M, Speijers J, et al. Fetal and maternal Doppler flow velocity waveforms in normal sheep pregnancy. *Placenta* 1987; 8: 467-476.
49. Ousey JC, Kolling M, Newton R, Wright M, Allen WR. Uterine haemodynamics in young and aged pregnant mares measured using Doppler ultrasonography. *Equine Vet J Suppl* 2012; 41: 15-21.
50. Tan SL, Zaidi J, Campbell S, Doyle P, Collins W. Blood flow changes in the ovarian and uterine arteries during the normal menstrual cycle. *Am J Obstet Gynecol* 1996; 175: 625-631.
51. Zaidi J, Collins W, Campbell S, Pittrof R, Tan SL. Blood flow changes in the intra-ovarian arteries during the periovulatory period: Relationship to the time of day. *Ultrasound Obstet Gynecol* 1996; 7: 135-140.
52. Elmetwally, Meinecke-Tillmann S. Non-invasive colour Doppler and B-mode ultrasonography as valuable tools to study uterine involution in small ruminants. *Reproduction in Dom Anim* 2011; 46: 13-14.
53. Krueger L, Koerte J, Tsousis G, Herzog K, Flachowsky G, et al. Transrectal Doppler sonography of uterine blood flow during the first 12 weeks after parturition in healthy dairy cows. *Anim Reprod Sci* 2009; 114: 23-31.
54. Acharya G, Sitras V, Erkinaro T, Makikallio K, Kavasmaa T, et al. Experimental validation of uterine artery volume blood flow measurement by Doppler ultrasonography in pregnant sheep. *Ultrasound Obstet Gynecol* 2009; 29: 401-406.
55. Reynolds LP, Caton JS, Redmer DA, Grazul-Bilska AT, Vonnahme KA, et al. Evidence for altered placental blood flow and vascularity in compromised pregnancies. *J Physiol* 2006; 572: 51-58.
56. Meschia. Circulation to female reproductive organs. *Am Physiol Soc* 1983; 1: 241-269.
57. Reynolds LP. Utero-ovarian interactions during early pregnancy: Role of conceptus-induced vasodilation. *J Anim Sci* 1986; 2: 47-61.
58. Wallace JM, Milne JS, Matsuzaki M, Aitken RP. Serial measurement of uterine blood flow from mid to late gestation in growth restricted pregnancies induced by over nourishing adolescent sheep dams. *Placenta* 2008; 29: 718-724.
59. Gomez O, Figueras F, Martinez JM, del Rio M, Palacio M, et al. Sequential changes in uterine artery blood flow pattern between the first and second trimesters of gestation in relation to pregnancy outcome. *Ultrasound Obstet Gynecol* 2006; 28: 802-808.
60. Papageorgiou AT, Leslie K. Uterine artery Doppler in the prediction of adverse pregnancy outcome. *Curr Opin Obstet Gynecol* 2007; 19: 103-109.

ADDRESS FOR CORRESPONDENCE:

Dr. Mohammed Ahmed Elmetwally, Theriogenology department, Faculty of Veterinary Medicine, Mansoura University, 35516 Mansoura, Egypt, Tel: +201068999571; Fax: +2050 2200696; E-mail: mohamed.elmetwally@hotmail.com

Submitted: July 27, 2016; Accepted: August 22, 2016; Published: August 29, 2016